FIBOX
Enclosing innovations

UL MNX UL PC 125/75 HG

Sample photo

Order symbol:	UL PC 125/75 HG	**EAN**:	6418074014337
Product nbr:	6411308	**El. number**:	
Description:	UL Enclosure, PC	Finland:	
Remarks:	Grey cover	Electric No. Denmark:	8212030284
		Electric No. Italy:	7351057U

Including: Base with TPE gasket, screws for mounting plate/DIN-rail and cover with polyamide cover screws.

Dimensions:	**Length**	**Width**	**Height**
mm:	130	130	75
inch:	5.1	5.1	3.0

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover screws material:	Polyamide
Cover colour:	RAL 7035 -light grey
Cover screws colour:	Grey
Gasket material:	TPE

Temperatures:

Temperature °C (short term):	-40 … 120 °C
Temperature °C (continuous):	-40 … 80 °C
Temperature °F (short term):	-40 … 250 °F
Temperature °F (continuous):	-40 … 175 °F

Rating:

Ingress Protection (EN 60529): IP66/IP67
Impact Resistance (EN 62262): IK08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
UV resistance: UL 508
Flammability Rating: UL 746C 5"
UL Type:
Glow Wire Test (IEC 695-2-1) °C: 960

Certificates:

Germanischer Lloyd (GL)
Underwriters Laboratories
SGS Fimko
UL Canada
Gost R

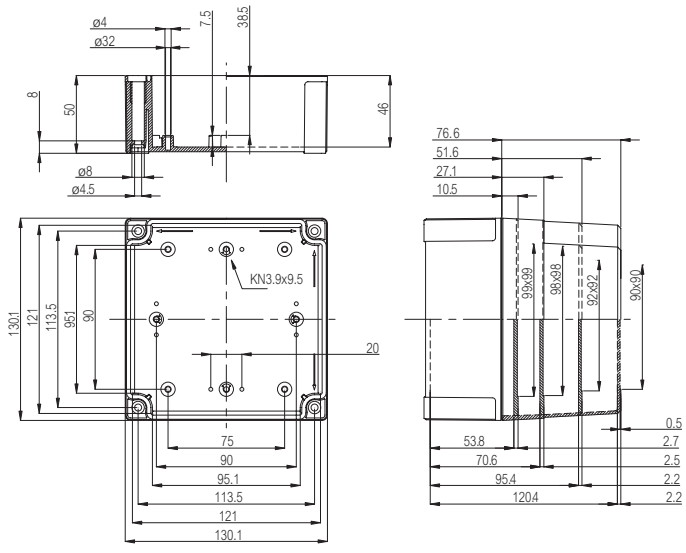

© Fibox Oy, Data subject to change without notice (printed: 23.5.2017)